



Living Industrial Partnerships

PRODUCT SPECIFICATION

PC Board Relays

26

Series





26 Series PC Board Relays



Technical Data	1
Specifications	2
Model Number Structure - Relays	3
Model Number Selection	4
Dimensions	5 - 6
Accessories	7
Safety Precautions.....	8



PC Board Relays



WERNER's 26 Series PC Board Relays are the product of your choice if your designs require SPDT or even DPDT abilities but board space and available heights in your casings is very limited. Like our 24 Series, the 25 Series products are fully sealed for use in harsh surroundings, whilst the 26 series products are not sealed but therefore your right choice when purchase price is the major issue.

Features Overview

- All models available for direct PC Board Mounting, PCB socket or Panel socket mounting
- All models designed applying MFMS design principles (Max Function Min Space)
- All models designed applying solid modeling and finite elements design methods
- 26 Series available as SPDT, DPDT, SPST-NO as well as DPST-NO
- All models available for use with 50 Hz and 60 Hz cycles

Highlights

- 26 Series unsealed but cheaper by providing a heights of only 25mm
- All models available in standard current ratings from 6V to 48V (DC)
- Available in SPST with up to 12 Ampere Continuous Load Current
- Available in SPDT with up to 8 Ampere Continuous Load Current
- All models provide Dielectric strength of 5.000V (AC)

26 Series PC Board Relays by WERNER offer you just the right products for those circuits where spaces is ever precious, but the large number of sets needed weigh out a little larger use of panel space against mentionable savings in the purchase invoice of the needed quantities.



PC Board Relays

Features:

- PC Board Relays
- Dielectric strength of 5,000V AC
- Compact and small
- Contact Capacity of 8A & 12A
- SPDT, DPDT, SPST-NO & DPST-NO



Approvals

Approbations and Declaration of conformity

- UL 
- CE 
- RoHS
- CCC 
- Demko 

Overvoltage category

III, as per EN IEC 60947-5-1

AC Coil Ratings

Voltage	Rated Current (mA) AC 60Hz	Coil Resistance (Ω)	Power Consumption (VA)	Operation Properties		
				Continuous Voltage	Pickup Voltage	Dropout Voltage
6V	150	16	Approx. 0.90	110% max. at 70°C (158°F)	80% max.	30% min.
12V	75	65				
24V	37.50	260				
110V	10.60	4600				
120V	7.50	6500				
220V	4.1	25000				
240V	5.30	30000				

±15% at 20°C

DC Coil Ratings

Voltage	Rated Current (mA)	Coil Resistance (Ω)	Power Consumption (MW)	Operation Properties		
				Continuous Voltage	Pickup Voltage	Dropout Voltage
6V	88.20	68	Approx. 530	110% max. at 70°C (158°F)	70% max.	15% min.
12V	43.60	275				
24V	21.80	1,100				
48V	11.50	4,170				
110V	4.80	22,900				

±15% at 20°C

Weight


Model No.	26.21 (SPDT)	26.22 (DPDT)	26.23 (SPST-NO)	26.24 (DPST-NO)
Weight (approx.)	17g	18g	15g	16g



Specifications

Operating Temperature	SPDT	-35 to +85°C (No freezing)
	DPDT	-35 to +85°C (No freezing)
Contact Resistance	-	100mΩ
Operating Humidity	-	5% to 85% RH
Insulation Resistance	-	1000MΩ minimum (at 500 VDC)
Dielectric Strength	-	5,000 VAC, 50/60 Hz for 1 minute between coil and contacts
	-	1,000 VAC, 50/60 Hz for 1 minute across contacts of same pole
	-	3,000 VAC, 50/60 Hz for 1 minute between contact sets, 2-pole non-latching
	-	1,000 VAC, 50/60 Hz for 1 minute between set and reset coils of dual coil latching
Vibration Resistance	-	10 to 55 Hz; 1.50 mm (0.06) double amplitude
	-	10 to 55 Hz; 1.50 mm (0.06) double amplitude
Shock Resistance	-	1,000 m/s ² (approx. 100G)
	-	200 m/s ² (approx. 20 G) when energized, 100 m/s ² (approx. 10 G) when de-energized
Mechanical Durability	-	10,000,000 operations min. DC: 20,000,000 operations min. (at 18,000 operations/hour)
Electrical Durability	-	100,000 operations min. (at 1,800 operations /hr) at rated load. See "Characteristics Data"
Operate Time	SPDT	15ms maximum
	DPDT	15ms maximum
Release Time	SPDT	AC: 10 ms max.; DC: 5 ms max.
	DPDT	AC: 10 ms max.; DC: 5 ms max.
Contact Material	-	Silver cadmium oxide
Operating Frequency	-	Electrical: 1,800 operations/hour (under rated load)
	-	Mechanical: 18,000 operations/hour

Electrical Characteristics

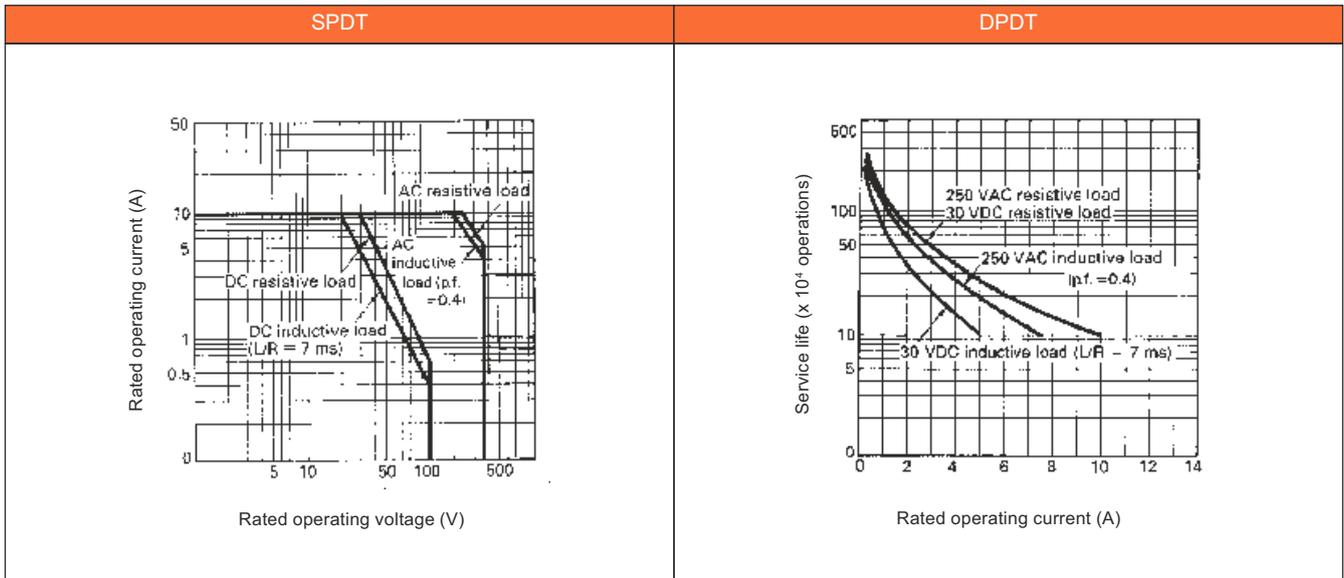



26 Series PC Board Relays



Model Number Structure - Relays



26.22.01.120

Series	
26	Series Relays

Terminal Type	
2	PC Board

Number of Poles	
1	SPDT
2	DPDT
3	SPST-NO
4	DPST-NO

Types	
0	Basic

Voltage	
006	6V
012	12V
024	24V
048	48V
110	110V
120	120V
220	220V
240	240V

Coil	
1	AC
2	DC

Model Number Selection



Appearance	Terminal Type	Types	Voltage	Model No.	
				AC	DC
 SPDT	PC Board	Basic	6V	26.21.01.006	26.21.02.006
			12V	26.21.01.012	26.21.02.012
			24V	26.21.01.024	26.21.02.024
			110V	26.21.01.110	26.21.02.110
			120V	26.21.01.120	–
			220V	26.21.01.220	–
			240V	26.21.01.240	–
 DPDT	PC Board	Basic	6V	26.22.01.006	26.22.02.006
			12V	26.22.01.012	26.22.02.012
			24V	26.22.01.024	26.22.02.024
			110V	26.22.01.110	26.22.02.110
			120V	26.22.01.120	–
			220V	26.22.01.220	–
			240V	26.22.01.240	–
 SPST-NO	PC Board	Basic	6V	26.23.01.006	26.23.02.006
			12V	26.23.01.012	26.23.02.012
			24V	26.23.01.024	26.23.02.024
			110V	26.23.01.110	26.23.02.110
			120V	26.23.01.120	–
			220V	26.23.01.220	–
			240V	26.23.01.240	–
 DPST-NO	PC Board	Basic	6V	26.24.01.006	26.24.02.006
			12V	26.24.01.012	26.24.02.012
			24V	26.24.01.024	26.24.02.024
			110V	26.24.01.110	26.24.02.110
			120V	26.24.01.120	–
			220V	26.24.01.220	–
			240V	26.24.01.240	–

Dimensions

26.21(SPDT)





SPDT

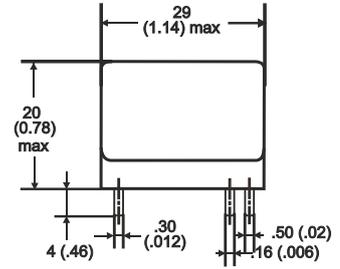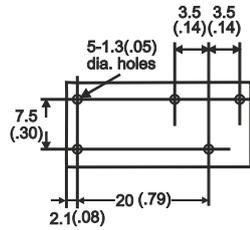

26.22(DPDT)






DPDT

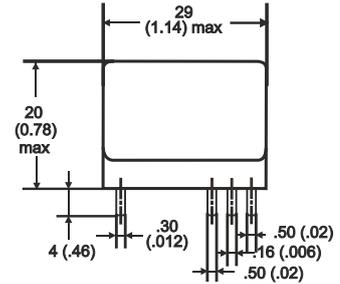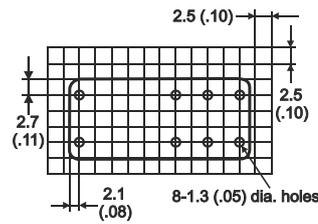

26.23(SPST-NO)



SPST-NO

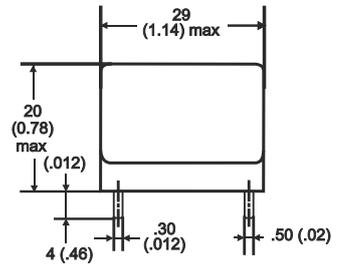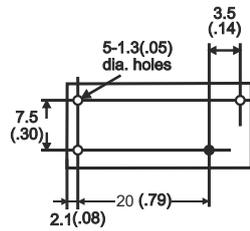



Dimensions

26.24(DPST-NO)




DPST-NO

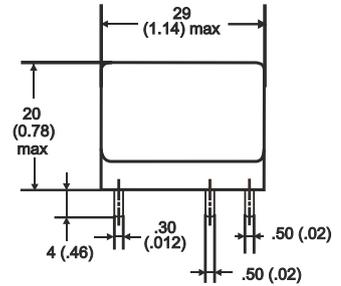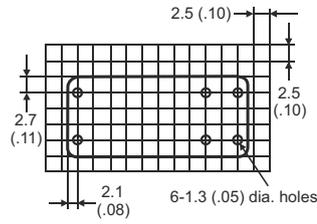


Internal Connection (Bottom View)


SPDT



DPDT



SPST-NO




DPST-NO




Accessories

DIN Rails

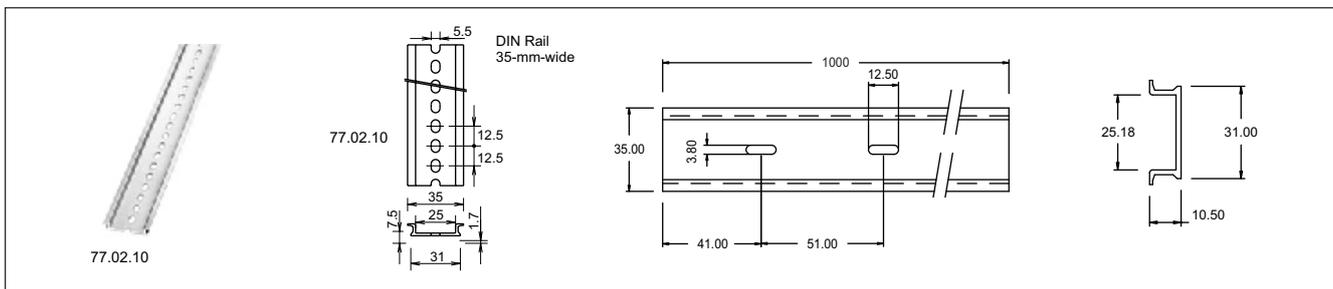

DIN Rail No.	Material	Length	Weight	Width
77.02.10	Aluminum	1000 mm	200 g	35 mm

Mounting Clips

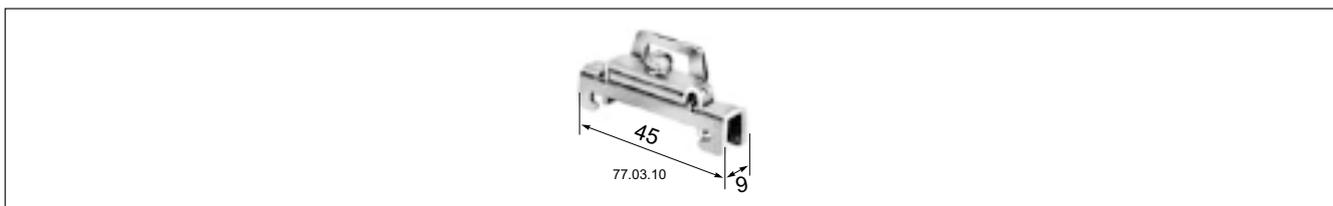

Mounting Clips No.	Rails	Width	Weight
77.03.10	77.02.10	45 mm	15.2 g

Applicable Clips

Appearance	Description	Relay	Suitable For DIN Mount Socket	Suitable For Feed through Sockets	Suitable For PCB Mount Socket
	Wire Spring	Suitable for all WERNER's 26 Series Relays	-	-	75.02.02


* For suitable relay please check Sockets catalogue

Socket Specification


Mounting	Terminal type	Terminal	Torque	Wire Size	Model No.	
					1 Pole	2 Poles
DIN Rail	With Finger-safe	M3 screws - coil M3.5 screws - contact	0.6 to 1.0 N.m	Up to 3.5mm ² (12AWG)	75.11.01	75.12.01
	With Spring Clamp	-	-	upto 1.5mm ²	75.11.05	75.12.05
PCB Mount Socket	PC Board	-	-	-	75.21	75.22

Protection


When an inrush current flows through the load, the contact may become welded. The contact ratings show maximum values, Make sure that these values are not exceeded. Contact a contact protection circuit, such as a current limiting resistor as a optional solution.



This protection circuit can be used when the load impedance is smaller than the RC impedance in an AC load power circuit.
R: Resistor of approximately the same resistance value as the load
C: 0.1 to 1 μF




This protection circuit can be used for both AC and DC load power circuits.
R: Resistor of approximately the same resistance value as the load
C: 0.1 to 1 μF




This protection circuit can be used for DC load power circuits. Use a diode with the following ratings.
Reverse withstand voltage: Power voltage of the load circuit x 10
Forward current: More than the load current.

Prevents



This protection circuit is very effective in arc suppression when opening the contact however, the capacitor is charged while the contacts are opened else the capacitor is discharged through the contacts, increasing the possibility of contact welding.



This protection circuit is very effective in arc suppression when opening the contact however, a current flows to charge the capacitor, causing contact welding when the contacts are closed.

Safety Precautions

Do not drop, shock or remove the relay cover to maintain the initial characteristics.
The relay cover cannot be removed from the base during normal operation.
Use the relay in environments free from dust, condensation, dioxide or hydrogen sulfide.

Make sure that the coil voltage does not exceed applicable coil voltage range.
Prevent usage of relays in the vicinity of strong magnetic field, as that may cause malfunctioning of relays.

Failure to turn off power before wiring, installation, removal and maintenance may cause electrical shock or fire hazard.

Attention on specifications and rated values to prevent electrical shock or fire hazard.
Use wires of the proper size to meet voltage and current requirements.

Tighten the terminal screws on the relay socket to the proper tightening torque.

Prevent using the check button as a switch.

The durability of the check button is a minimum of 200 operations.

It is advisable to apply a positive voltage to terminals of neighboring poles and a negative voltage to the other terminals of neighboring poles when using DC loads on 4PDT relays to prevent the possibility of short circuits.

A soldering iron of 30 to 60W would be recommended when soldering the relay terminals and the preferred time to complete soldering is within 4 seconds approximately.



Terms And Conditions

Please read this catalog before purchasing any products. Please consult your *WERNER* representative for any clarifications or comments.

Application Considerations

WERNER shall not be responsible for conformity with any regulations, codes or standards that apply to use of the products. *WERNER* shall provide applicable third party certification documents identifying ratings and limitations of use that apply to the products in case of the customer's request.

Prevent use the products for an application involving risk to life or property. Be sure that the *WERNER*'s products are properly rated and installed for the overall system or equipment.

WERNER shall not be responsible for the user's programming of a programmable products.

Warranty

WERNER's warranty represents that the products are free from defects in materials and workmanship for a period of one year.

WERNER shall not be responsible for any special loss of profit, commercial loss, indirect or consequential damages relevant to products.

WERNER shall not be responsible for repair, warranty or any claims regarding the products unless *WERNER*'s Analysis confirm that the products were properly stored, installed, handled, maintained and not a result of accident, insufficient, abuse, misuse, natural disaster, improper installation excessive electrical supply, environmental conditions or abnormal mechanical.

Disclaimers

WERNER shall practice to change type/model numbers when published ratings or features are changed, however some specifications of the products may be changed without any notice.

When in doubt, please consult with your *WERNER* representative to confirm actual specifications of products.

WERNER shall change product specifications and accessories at any time based on improvements and other reasons.

The information in this catalog has been carefully checked. However, *WERNER* take no responsibilities for clerical, typographical or proofreading errors.



Product specifications are subject to change without notice.

Thank you for choosing *WERNER* products.



Living Industrial Partnerships



Werner Electric GmbH

Otto-Brenner-Str. 209

D-33604 Bielefeld

Germany

T: +49 521 9276307

F: +49 521 9276102

E: info@wernerelectric.de

W: www.wernerelectric.de

WE Electric India (P) Ltd.

#278-B, Hootagalli,

Hebbal Industrial area

Mysore-570018, India

T: +91 821-425 4500

F: +91 821-425 4599

E: info@in.wernerelectric.de

W: www.wernerelectric.de